


The eco friendly blanket using “zerosolvent technology”

Special EPDM surface rubber resistant to the latest generation of UV inks (Le/HUV - Led/UV)


Very high printing quality

Low stretch carcass and available in 1,70 & 1,95 mm


Suitable for pure UV printing only

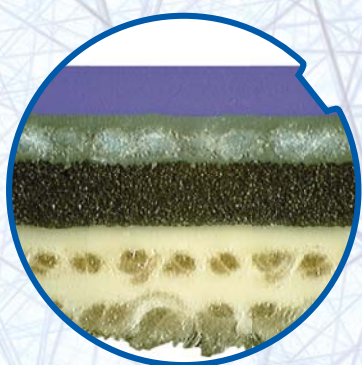

CROSS SECTION

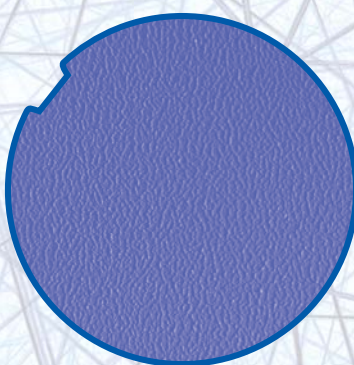

SURFACE

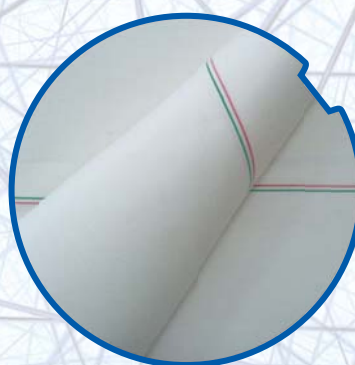

BACK

TECHNICAL DATA

Colour	Violet
Construction	3 fabric layers
Compressible Layer	Closed cells
Thickness mm	1,70/1,95 $\pm$ 0,02 mm
Roughness Ra	According to application
Surface Hardness	60° Shore A
Hardness (total)	77° Shore A
Tensile Strength	> 75 Kg/cm
Elongation at break	< 4,5%
Compressibility	20-35 Kg/cm ² at 0,23 mm deformation
Application fields	Large sheetfed size, narrow web, packaging
Identification lines	Red+green
Ink compatibility	Resistant to UV inks