

ADVANTAGE PLUS

Sheetfed blanket

Designed and formulated for a wide range of sheetfed presses for printing on paper/carton stocks.

COLOUR

Blue

CONSTRUCTION

Cord Carcass

TYPE

Compressible

SURFACE FINISH

Ground and polished

SURFACE ROUGHNESS, RA

0.60 – 0.90 μm

MICRO HARDNESS

65 +/- 3 IRHD

STRETCH

< 0.70% @ 500 N/5 cm

NOMINAL THICKNESS

1.95 mm (ISO 12636)

1.70 mm (ISO 12636)

GAUGE LOSS

≤ 0.02 mm

BOTTOM LAYER

Water/Solvent sealed

PACKING & TENSIONING

Conform to OEM instructions


APPLICATION

- Sheetfed
- Heatset
- Coldset
- Packaging
- Coating
- Metal
- Continuous F.

INK

- UV
- Conventional
- Hybrid

STRUCTURE

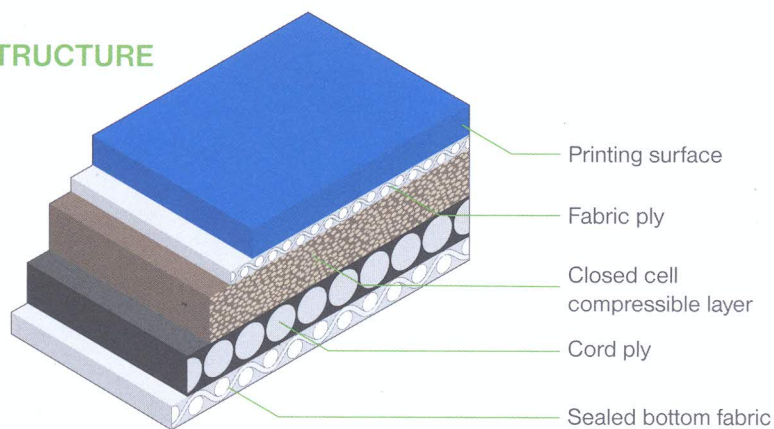

● Recommended ● Suitable ● Not recommended

CHARACTERISTICS

ADVANTAGES

Dimensional Stability

Virtually no sinking or stretching giving the blanket an exceptional dimensional stability. After mounting no need for further re-tensioning thus leading to a reduced down time.

Closed Cell Compressible Layer

New compressible layer coupled with a radial cord carcass improves durability, offers excellent shock absorption and rapid recovery. Resists solvent penetration, reduces the risk of delamination.

Microground Printing Surface

The specially formulated surface compound is specifically ground in order to ensure excellent ink transfer and dot reproduction on a wide range of paper/carton qualities.

Sealed Bottom Layer

Provides added protection against water and chemical penetration.